

SYSTEM CLOCKS

CC186U SERIES

1.8 INCH, 6 DIGIT - USB CONTROLLED, SYSTEM CLOCKS



For Studios, Courtrooms, Museums, Theaters, Boardrooms, and Churches.

12 / 24 Hour Format... USB or RS232 Controlled

Bright Red Diffused LED Digits - Visible over 50 feet away

Capacitive Backup - No Batteries Required

Single and Double Sided models

Low Voltage : 12 VAC Powered



CC186U Series System Clocks can be set and controlled via USB or RS232 communications. All CC186U Series System Clocks receive serial data input from computers or other controllers, for setting time and/or displaying short messages such as "FirE" and "bELL".

MODELS AVAILABLE

All CC186U Series Clocks have a black anodized aluminum enclosure (12"W x 3.5"H x 3.5"D) with 1/8" red acrylic lenses.

CC186U

System Clock, Single Sided, (w/ rubber feet), 12 VAC

CC186U/2

System Clock, Double Sided, (w/ rubber feet), 12 VAC

1210-0102

Optional Mounting Angles for bottom and top mounting applications (Two Required).

1220-0303-2

Optional Wall Mount Plate for side mounting applications.




800-444-7161

BOX 5705 • SHREVEPORT, LOUISIANA • 71135


FAX: 318-797-4864

www.ats-usa.com


phone: 318-797-7508

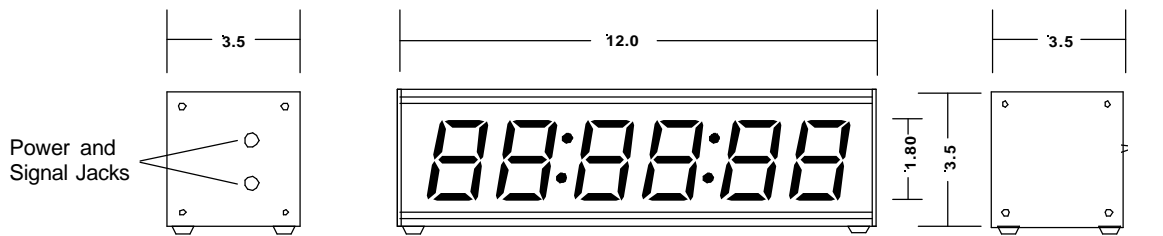

CC186U and CC186U/2 Single and Double-Sided, System Clocks with Rubber Feet

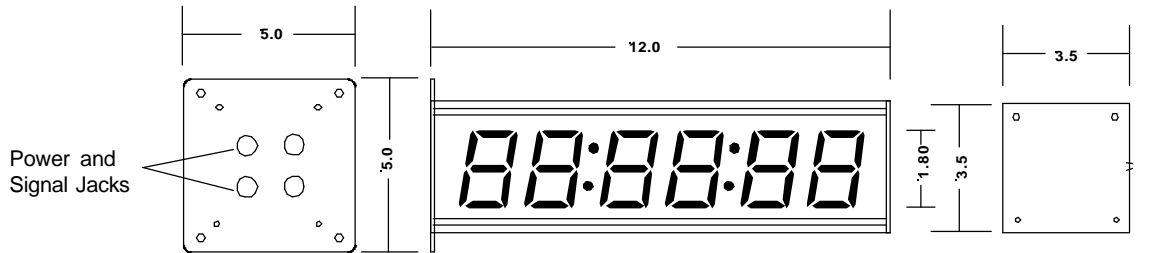


Optional Wall Mount Plate for Single or Double-Sided models

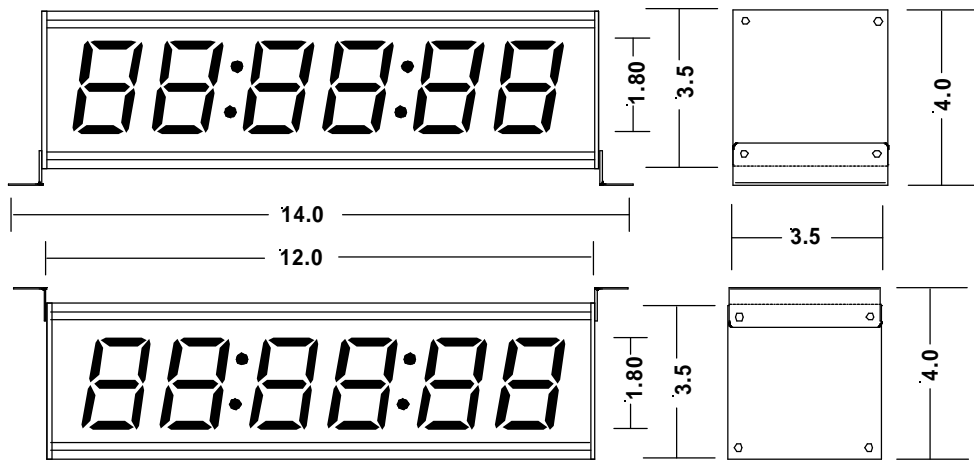

Optional Mounting Brackets for top and bottom mounting Single or Double-Sided models

WIRING:

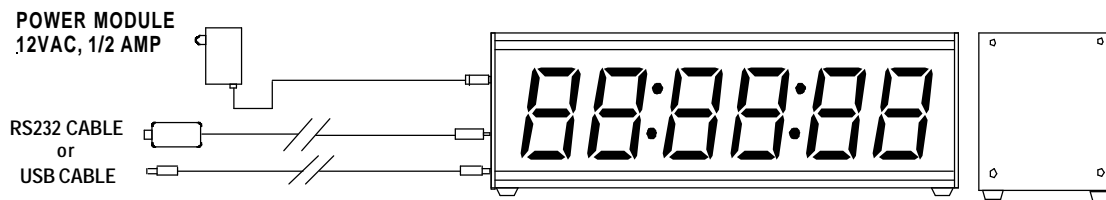

SPECIFICATIONS:

CC186U Single Sided, 1.8" High Digits
Power: 12 VAC, 6 VA Max, 50/60 Hz

CC186U/2 Double Sided, 1.8" High Digits
Power: 12 VAC, 6 VA Max, 50/60 Hz

120 VAC to 12 VAC Power Module and data cables are included.

Capacitive Backup, 12 or 24 Hour Format (Mode Selected by Serial Data, only)

USB / RS232 Input - Serial Data, ATS - 10 Byte Message
Sets Time in 12 or 24 Hr format, runs elapsed time, and displays ASCII Messaging (Limited).