

8FT POWER CORD  
 PROVIDED: 120VAC, 60HZ  
 INPUT STANDARD  
 (OPTIONAL POWER  
 AVAILABLE)




COM  
 REC  
 TRANSMITS "GOAL" COUNT  
 DN ADDRESS 1, "ACTUAL"  
 COUNT DN ADDRESS 2.

RS232 OUTPUT  
 SENDS AND RECEIVES DATA  
 FOR UP TO 32 DISPLAYS  
 (INCLUDING THE "GOAL" &  
 "ACTUAL" DISPLAYS, THE  
 RUN TIME, AND THE TOTALS  
 (IF APPLICABLE).



\* THESE SWITCHES ARE ALSO  
 INSTALLED ON THE FRONT  
 PANEL OF THE DISPLAY.  
 (DRY CONTACT ONLY)

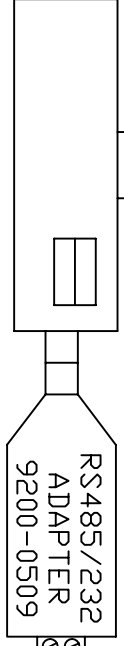

(A)  
 (B)

NCAD LTVATS DWG\PRDD MONITORS\  
**APPLIED TECHNICAL SYSTEMS**  
 P.O. BOX 5705  
 SHREVEPORT, LA  
 71135

COMPUTER WITH  
 ATS SOFTWARE:  
 (LATEST VERSION)

| APPROVALS       | DATE    |
|-----------------|---------|
| DRAWN BY<br>GJB | 5/30/01 |
| CHECKED BY      |         |
| APPROVED BY     |         |

| PROJECT                      | SCALE              |
|------------------------------|--------------------|
| AE44-503J PRODUCTION MONITOR | JOB # 503J         |
|                              | SHEET #            |
|                              | REVISION           |
|                              | FILENAME: 503JW/D1 |
|                              | DRAWING #          |

DESCRIPTION  
 WIRING DIAGRAM