PN AE44-503L

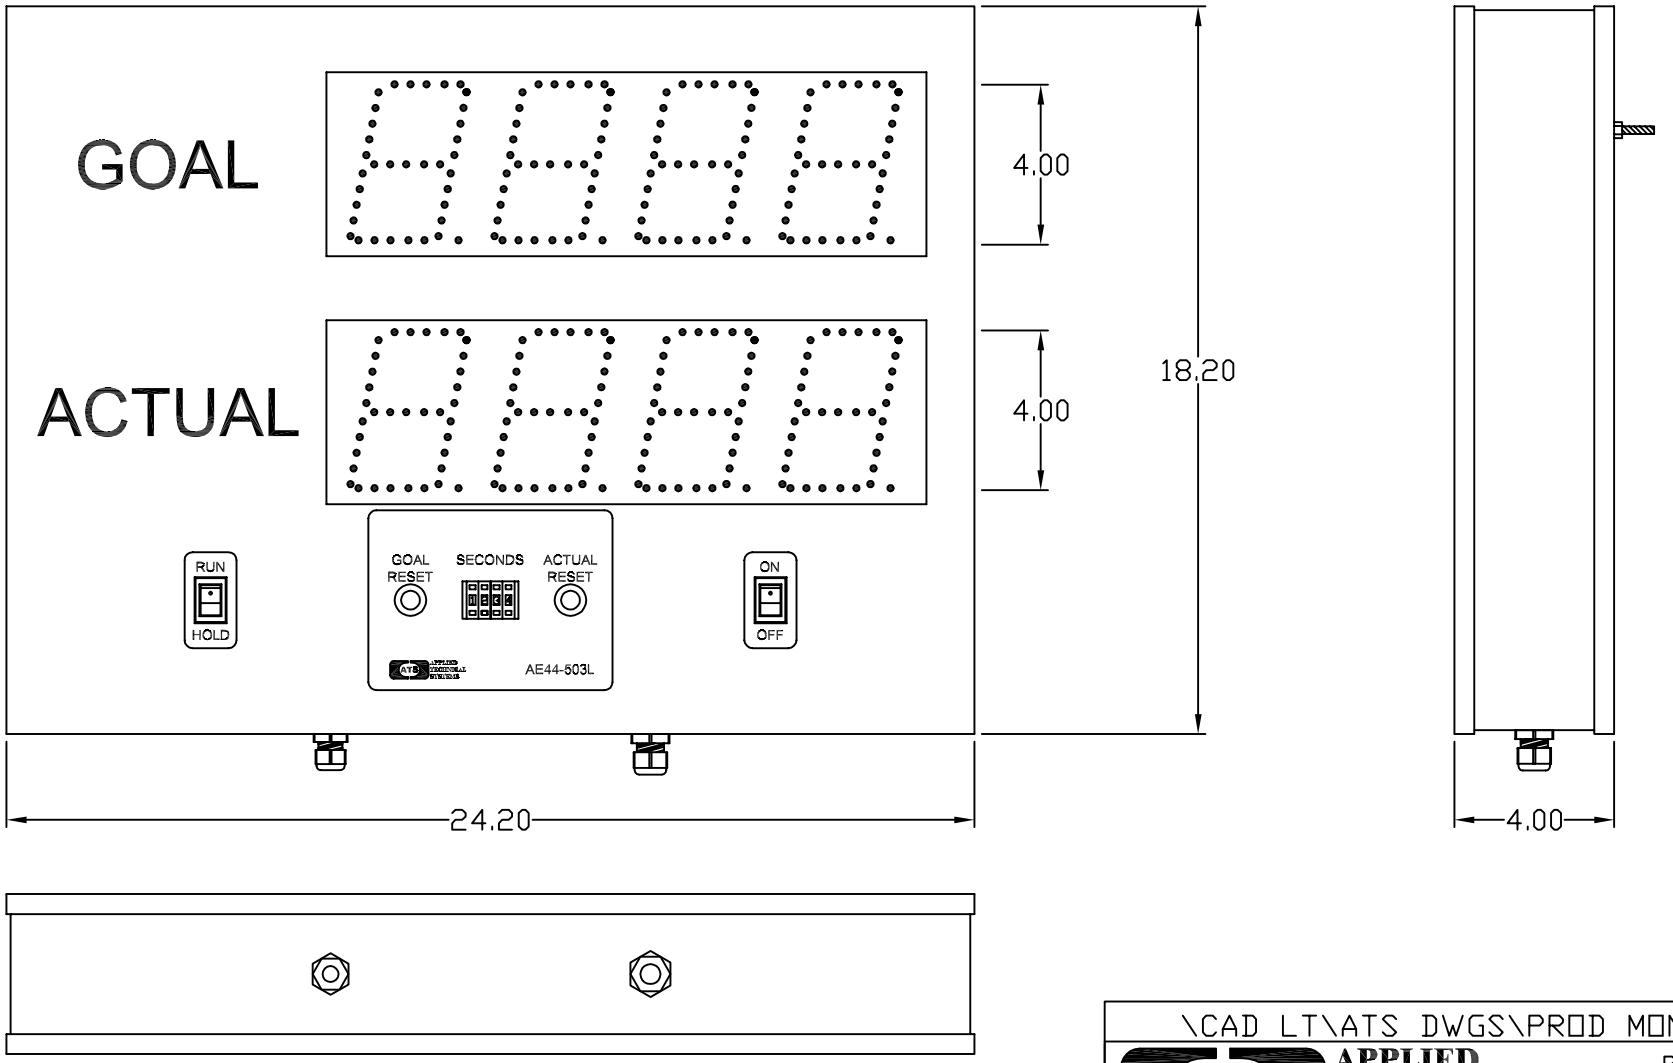

SPECIFICATIONS:

ENCLOSURE: (062 STEEL) BLACK POLANE TEXTURE
EACH DISPLAY CONSISTS OF FOUR-FOUR INCH HIGH, 7 SEGMENT DIGITS.
"GOAL" LED'S ARE RED.
"ACTUAL" LED'S ARE GREEN
OPERATES FROM 120 VAC, 60HZ.
OPTIONAL 12 VAC, 220 VAC, 12 VDC AND 50 HZ.
.118" THICK ACRYLIC LENSES, NON GLARE
STANDARD MOUNTING: (2) 1/4" STUDS ON BACK PANEL
OPTIONAL MOUNTING AVAILABLE
AVAILABLE OPTIONS: OPT-509 (RS485 INTERFACE)

\CAD LT\ATS DWGS\PROD MONITORS\

APPLIED TECHNICAL SYSTEMS
P.O. BOX 5705
SHREVEPORT, LA
71135

APPROVALS	DATE
DRAWN BY DTI	4-5-01
CHECKED BY	
APPROVED BY	

PROJECT: AE44-503L

DESCRIPTION: ASSEMBLY

SCALE 1:5
JOB #
SHEET #
REVISION 6/6/01 GB
FILENAME: AE44-503L
DRAWING #